

A BROADBAND SEISMIC EXPERIMENT IN YUNNAN, SOUTHWEST CHINA

Wenjie Jiao,¹ Winston Chan,¹ and Chunyong Wang²

Multimax Inc.,¹ Institute of Geophysics, China Seismological Bureau²

Sponsored by Defense Threat Reduction Agency

Contract No. DTRA01-00-C-0081

ABSTRACT

A broadband portable seismic network has been deployed in Yunnan, southwest China, to collect seismic data for advanced studies on regional crustal and mantle structures, earthquake prediction, and regional characteristics of wave propagation and seismic sources. The region in southwest China is situated in an evolving tectonic region transitioning between the uplifted Tibetan plateau to the west and the Yangtze continental platform to the east. The region displays varying crustal thickness from 35 km to over 60 km with seismic activity strongly associated with the locally mapped active faults.

The temporary seismic network, consisting of 25 portable broadband and narrow-band seismic stations, is deployed in the region of 98°E-105°E, 21°N-29°N. There are also 23 permanent digital broadband seismic stations recording in the region. Yunnan has the strongest intra-plate seismic activities in China. Moreover, there are several strong seismic zones in its surrounding areas, such as Tibet, Sichuan, Burma, and India. The strong seismicity in Yunnan and its surrounding areas provides the foundation for success of this deployment. Preliminary analyses have yielded an enhanced ground truth database, a 3-D structure model (together with some other analyses) for improving location, and characteristic spectral ratios for different events. Moreover, analysis of the recordings of some events of special interest, such as the January 26, 2001, M7.7 India earthquake and the February 14, 2001, M5.0 Yajiang, Sichuan, earthquake, has provided useful information on the source, path, and site effect, that are important for regional seismic studies.

KEY WORDS: Yunnan, Southwest China, broadband network, regional seismology, crustal structure

OBJECTIVE

The major purpose of this project is to collect fundamental ground truth data for advanced studies on regional crustal and mantle structures, earthquake prediction, and regional characteristics of wave propagation and seismic sources in Yunnan, China, through deploying a broadband portable seismic network in the area. The region in southwest China is situated in an evolving tectonic region transitioning between the uplifted Tibetan plateau to the west and the Yangtze continental platform to the east. The region displays varying crustal thickness from 35 km to over 60 km with seismic activity strongly associated with the mapped active faults. Figure 1 shows the topography of the Yunnan province. Yunnan has the strongest intra-plate seismic activities in China. There are several strong seismic zones in its surrounding areas, such as Tibet, Sichuan, Burma, and India. Moreover, there is an abundance of mining activities in this area. The strong seismicity and the intensive mining activities in Yunnan and its surrounding areas provide the foundation for success of this deployment.

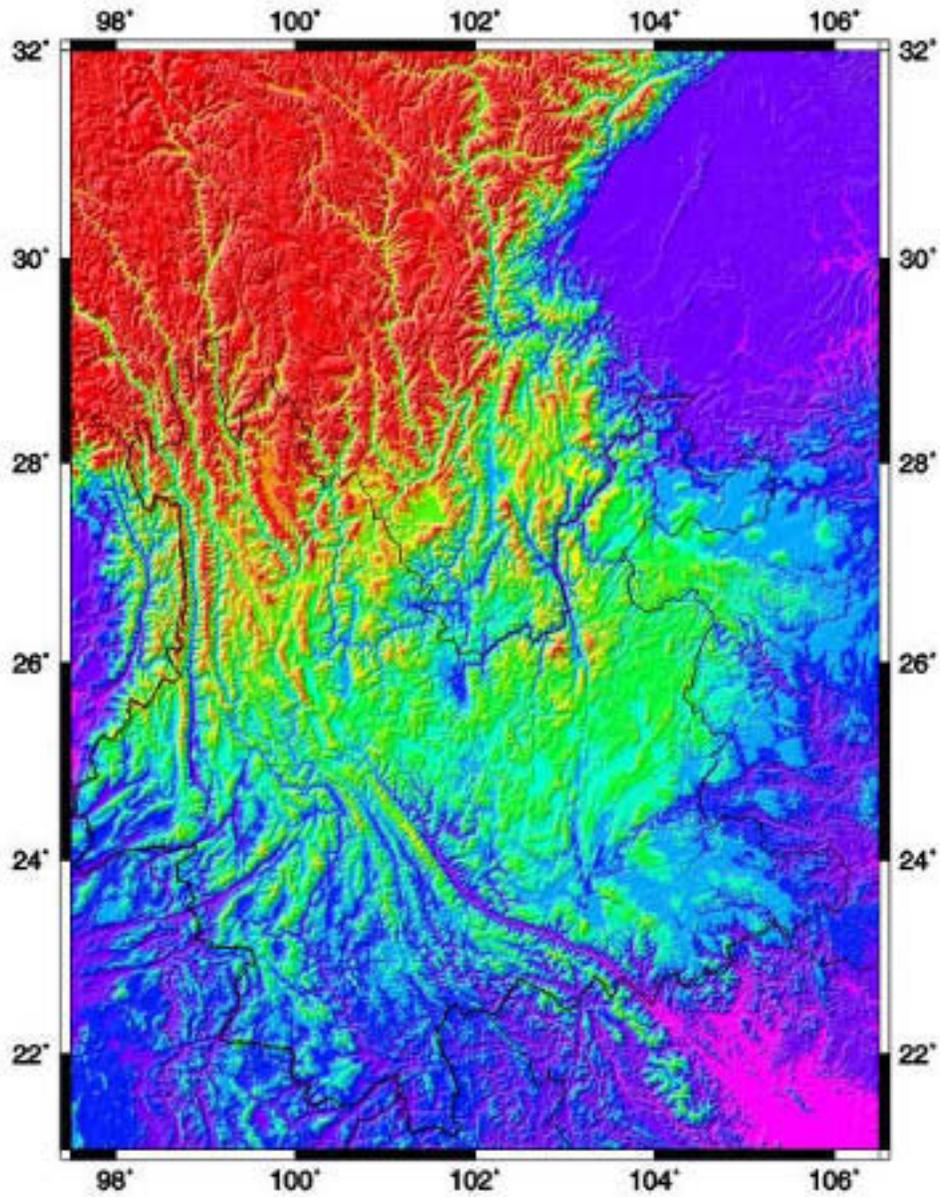


Figure 1. The topography in Yunnan, China. Large river valleys are often the places that the active faults cut through.

RESEARCH ACCOMPLISHED

More than 25 broadband portable stations have been deployed in Yunnan, China, jointly by Multimax Inc. and the Institute of Geophysics, China Seismological Bureau. The region covers 98°E-105°E, 21°N-29°N (Figure 2).

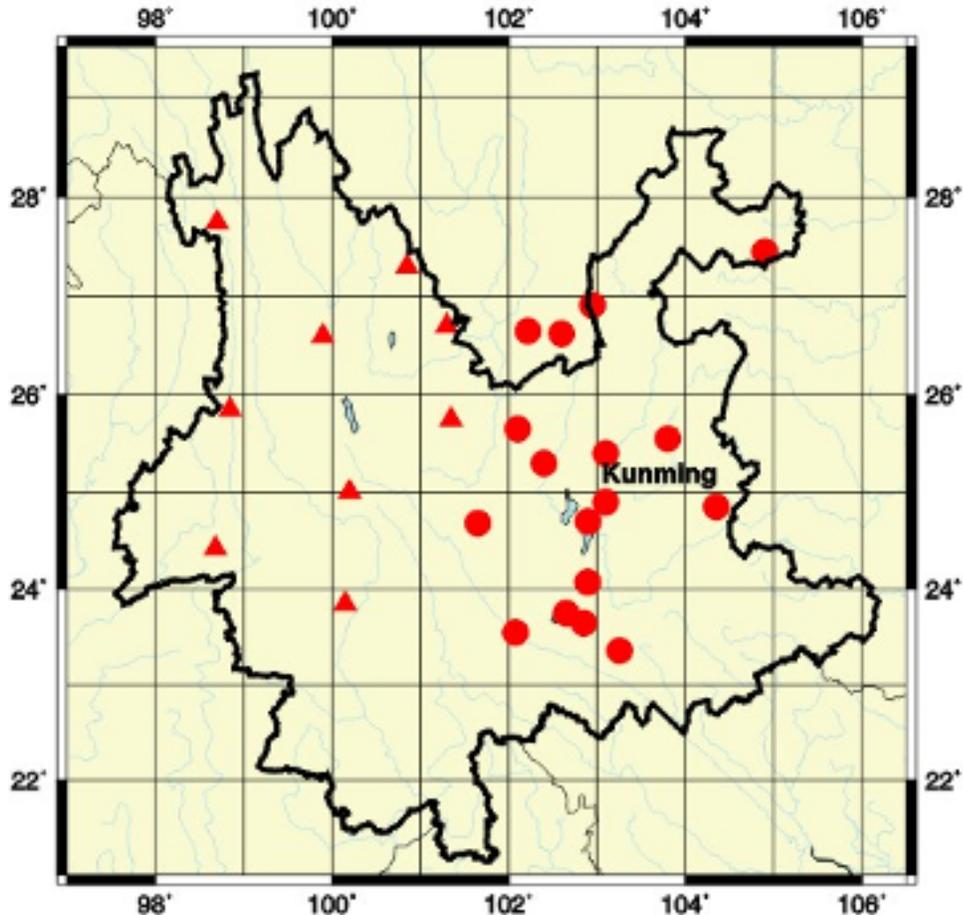


Figure 2. The stations of the portable broadband seismic network. Triangles are PASSCAL-type stations deployed by Multimax Inc. Circles are Chinese broadband instruments deployed by the Institute of Geophysics, CSB.

Most of the instruments are deployed alongside the existing short-period stations of the Yunnan Seismological Bureau (Figure 3a). The instruments are installed in vaults that are typically 30 meters deep extending horizontally into the hillside (Figure 3b). The local provincial bureaus provide the support in the security and maintenance of the instruments. Due to the remoteness of some of these stations, consistent power source remains a major issue that requires a high level of maintenance from our local collaborators. U.S. technicians return to the sites at regular intervals to perform data collection and maintenance of the instruments. The deployment and data collection will continue through June of 2002.

At the present stage of research, the data are being retrieved and transferred to Beijing and Washington from the field sites. The systematic analyses will be performed once a more complete data set becomes available. Several examples of different events recorded at various distances are shown in Figures 4 through 7 displaying the data quality.



Figure 3(a): Top – Broad-band instruments installed side by side to short-period Chinese SK-type instruments
Figure 3(b): Bottom – Entrance to vault housing the seismic instruments at one site in Yunnan, China

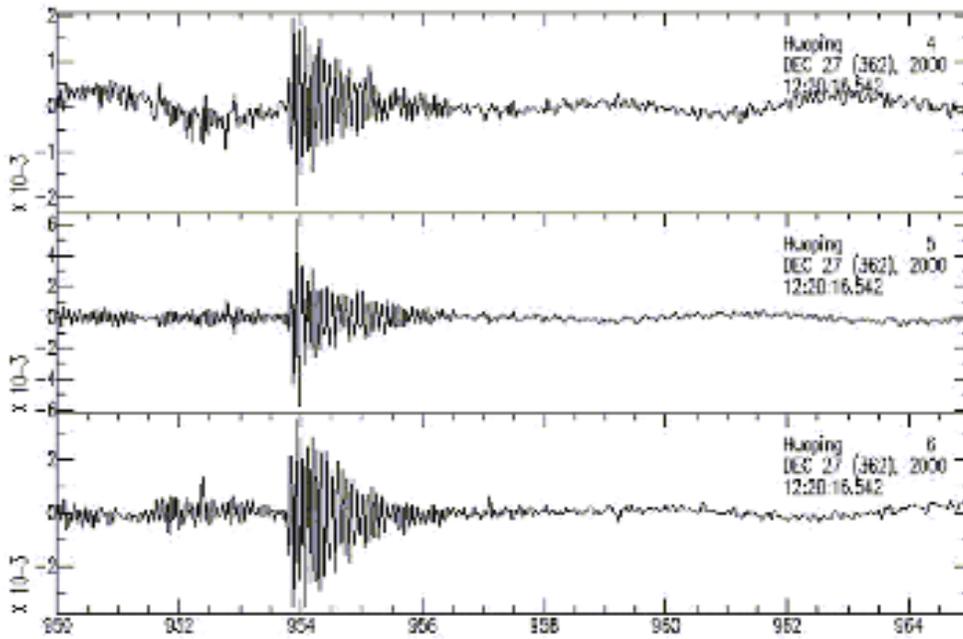


Figure 4. An example of local events. These events are in large amount. Some of them are explosions at local mines.

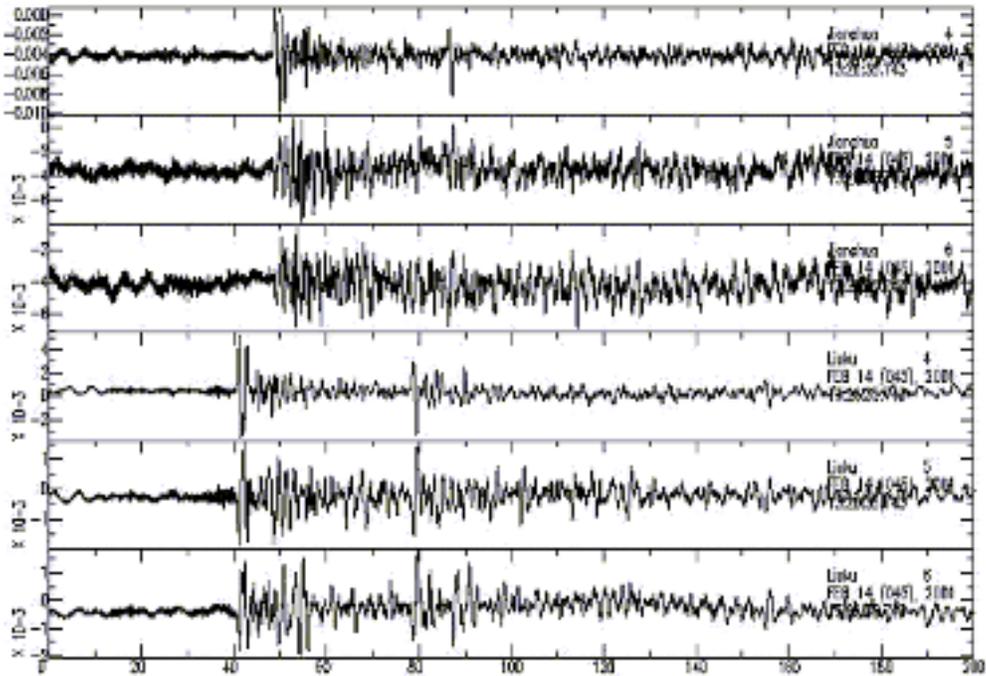


Figure 5. Example waveforms of a local ($\Delta \sim 5^\circ$) M5.0 earthquake that occurred in Yajiang, Sichuan Province.

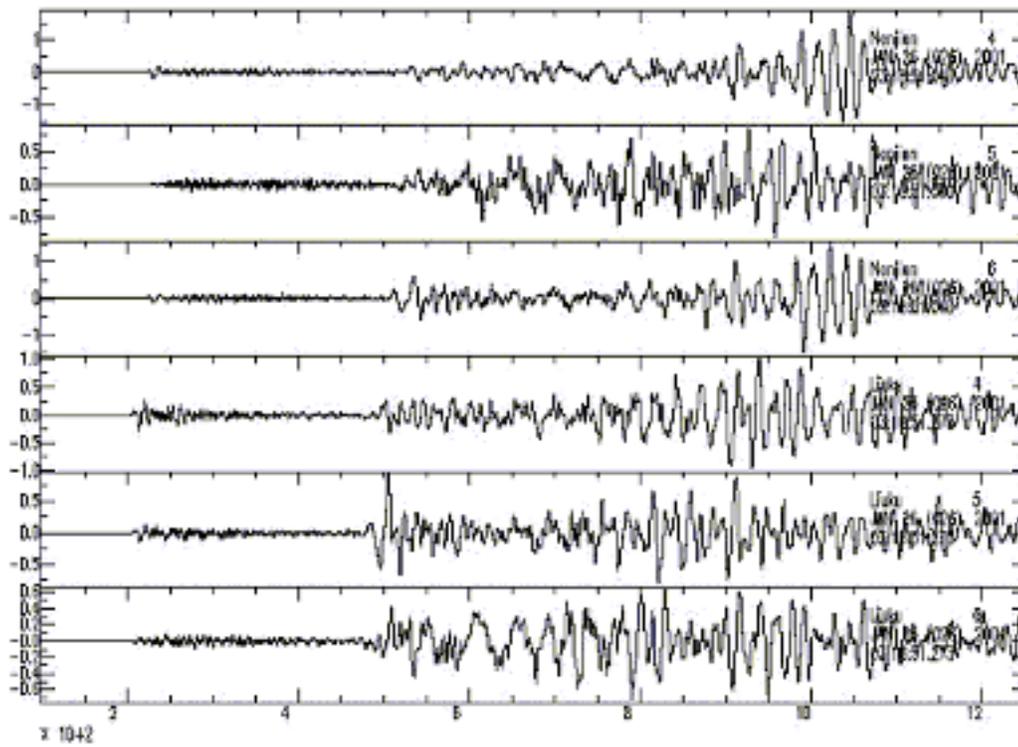


Figure 6. Example waveforms of a regional ($\Delta\sim 26^\circ$) M7.6 large earthquake that occurred in India.

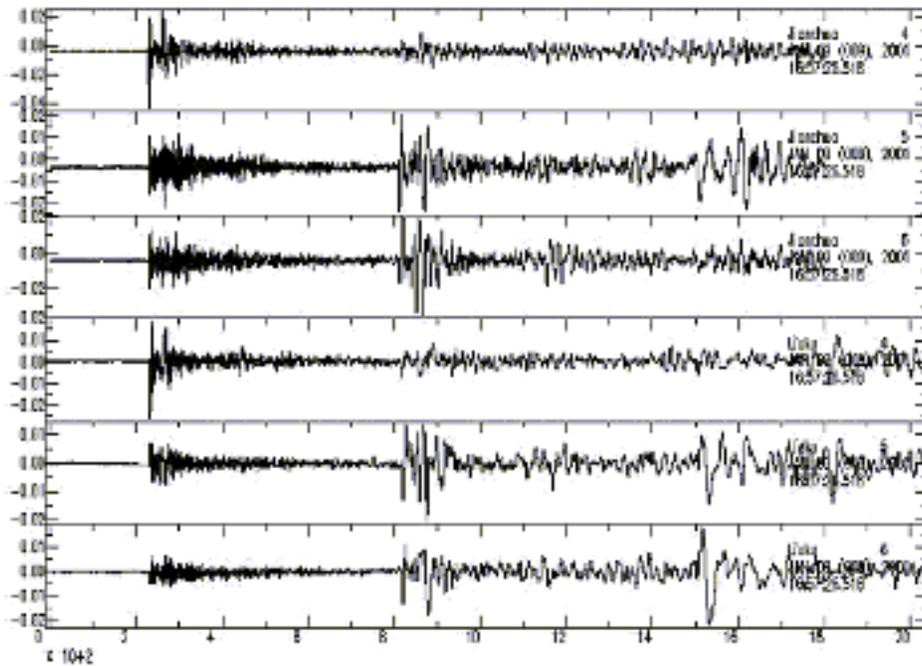


Figure 7. Example waveforms of a teleseismic ($\Delta\sim 77^\circ$) M7.0 large earthquake that occurred in Vanuatu Islands.

CONCLUSIONS

High-quality waveform data with a full compliment of epicentral distances have been recorded by the portable broadband network. The complete dataset of this deployment will contribute tremendously to the ground truth information of Yunnan area. Such data are very important for studies in seismic source, earthquake prediction, and earthquake hazard reduction.

REFERENCES

- Aki, K. (1980), Attenuation of shear waves in the lithosphere for frequencies from 0.05 to 25 Hz, *Phys. Earth Planet. Inter.*, 21, 50-60.
- Chen, P. S., F. T. Liu, Q. Li, and J. Z. Qin (1991), The lateral inhomogeneity in Yunnan province. China, *Science in China (Series B)*, 34 (5), 630-640.
- Cui, Z. Z., D. Y. Du, J. P. Chen, Z. Y. Zhang, and L. Y. Huang (1987), The Deep Structure and Tectonic Features of the Crust in Panxi Area, *Chinese J. Geophys.*, 30(6): 566-580 (in Chinese).
- Ge, B. R., and K. Y. Yang (1990), Mesozoic-Cenozoic Tectonic Features in Panzhihua-Xichang Area, *Chinese J. Geophys.*, 33(1): 64-69 (in Chinese).
- Herrmann, R. B., and C. J. Ammon (1997). Faulting parameters of earthquakes in the New Madrid, Missouri, region, *Engineering Geology* 46, 299-311.
- Hu, H. X., et al. (1986), Explosion Investigation of the Crustal Structure in Western Yunnan Province. *Chinese J. Geophys.*, 29(2), 133-144 (in Chinese).
- Hu, H. X., Z. Y. Lin, Y. J. Bian, C. Y. Wang and L. B. Zhu (1996), Study on the Characteristics of Crust-Mantle Transition Zone in Western Yunnan Province, *Acta Seismologica Sinica*, 18 (4): 444-450 (in Chinese).
- Lin, Z., et al. (1993), The Preliminary Interpretation of Deep Seismic Sounding in Western Yunnan, *Acta Seismologica Sinica*, 15 (4): 427-440 (in Chinese).
- Liu, R. F., P. S. Chen, and Q. Li (1993), Three-Dimensional Velocity Images in Yunnan and Its Neighbouring District, *Acta Seismologica Sinica*, 15 (1): 61-67 (in Chinese).
- Liu, Z., R. B. Herrmann, J. Xie, and E. D. Cranswick (1991), Waveform characteristics and focal mechanisms of five aftershocks of the 1983 Goodnow, New York, earthquake by polarization analysis and waveform modeling, *Seism. Res. Letters*, 62, 123-133.
- Malagnini, L. (1999), Ground Motion Scaling in Italy and Germany, *Ph. D. Dissertation*.
- National Research Council (1997), Research Required to Support Comprehensive Test Ban Treaty Monitoring, National Academy Press, Washington, D.C.
- Qin, J. Z., and R. J. Kan (1986), Q Values and Seismic Moments Estimates Using the Coda Waves of Near Earthquakes in the Kunming and Surrounding Regions, *Chinese J. Geophys.*, 29(2): 145-155 (in Chinese).
- Raooof, M., R. B. Herrmann, and L. Malagnini (1999), Attenuation and excitation of three-component ground motion in Southern California, *Bull. Seism. Soc. Am.* 89, (Aug. 99) preprint.
- Rodgers, A. and W. Walter (1997), Regionalization and calibration of seismic discriminants, path effects, and signal-to-noise for station ABKT, *Proc. 19th Annual Seismic Research Symposium on Monitoring a*

Comprehensive Test Ban Treaty (Editors: M. J. Shore, R. S. Jih, A. Dainty, and J. Erwin), Defense Special Weapons Agency, Alexandria, 143-151.

Sun, K. Z., J. W. Teng, D. M. Jin, and Y. Zheng(1987), Q-Value and Its Lateral Variations in Pan-xi Tectonic Belt, *Chinese J. Geophy.*, 30(1): 101-104 (in Chinese).

Wang, C. Y., X. L. Wang, and Q. Z. Yan (1994), Tree Dimensional Velocity Structure Beneath the Kunming Telemetered Seismic Network. *Acta Seismologica Sinica*, 1994, 16 (2): 167-175 (in Chinese).

Xiong, S. B., J. W. Teng, Z. X. Yin, M. H. Lai , and Y. P. Huang (1986), Explosion Seismological Study of the Structure of the Crust and Upper Mantle at Southern Part of the Panxi Tectonic, Belt, *Chinese J. Geophy.*, 29(3), 235-244 (in Chinese).

Xiong, S. B., et al. (1993), The 2-D Structure and Its Tectonic Implications of the Crust in the Lijiang-Panzhihua-Zhejiang Region, *Chinese J. Geophy.*, 36(4), 434-444 (in Chinese).

Yazd, M. R. S. (1993), Ground motion studies in the Southern Great Basin of Nevada and California, *Ph. D. Dissertation*, Saint Louis University, 189p.

Zhu, P. D., Y. M. Li, L. M. Zhang, P. Y. Shu and S. H. Liang (1986), On the Study of the Seismic Telemetry Network in South Sichuan and North Yunnan Provinces, *Chinese J. Geophy.*, 29(3), 245-254 (in Chinese).